

FIG. 1





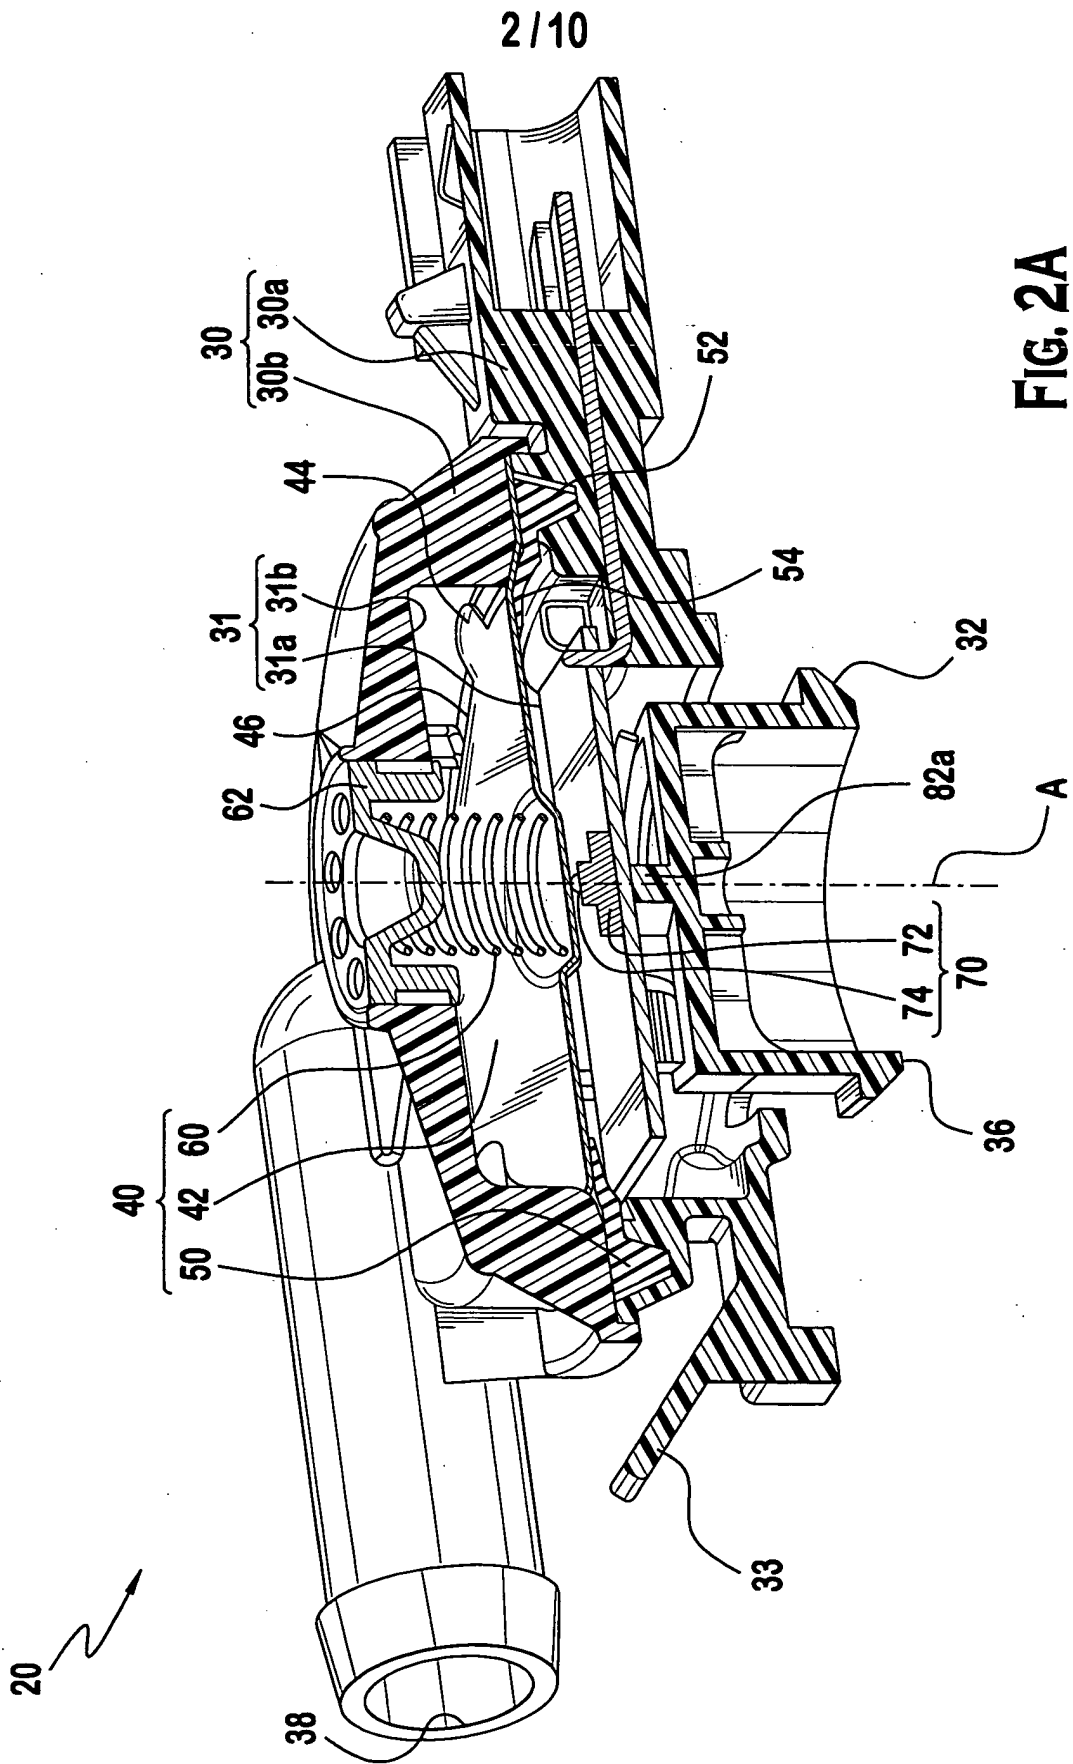


FIG. 2B

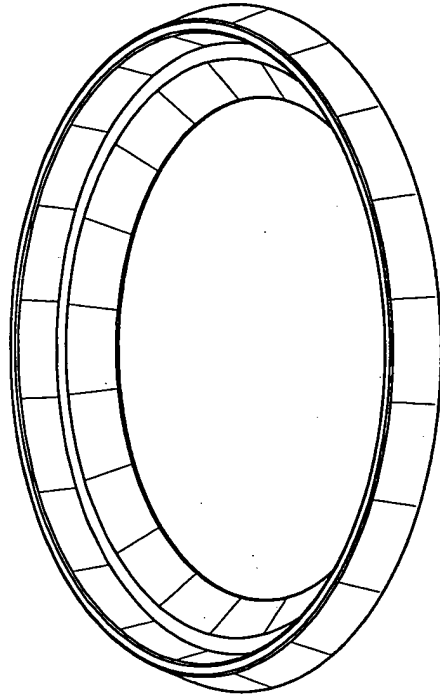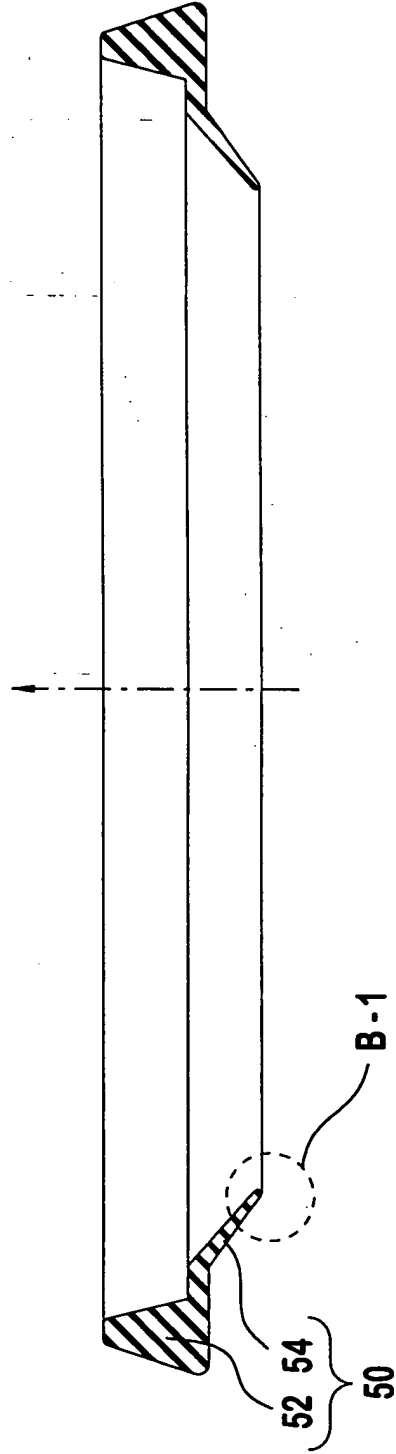

DETAIL B-1



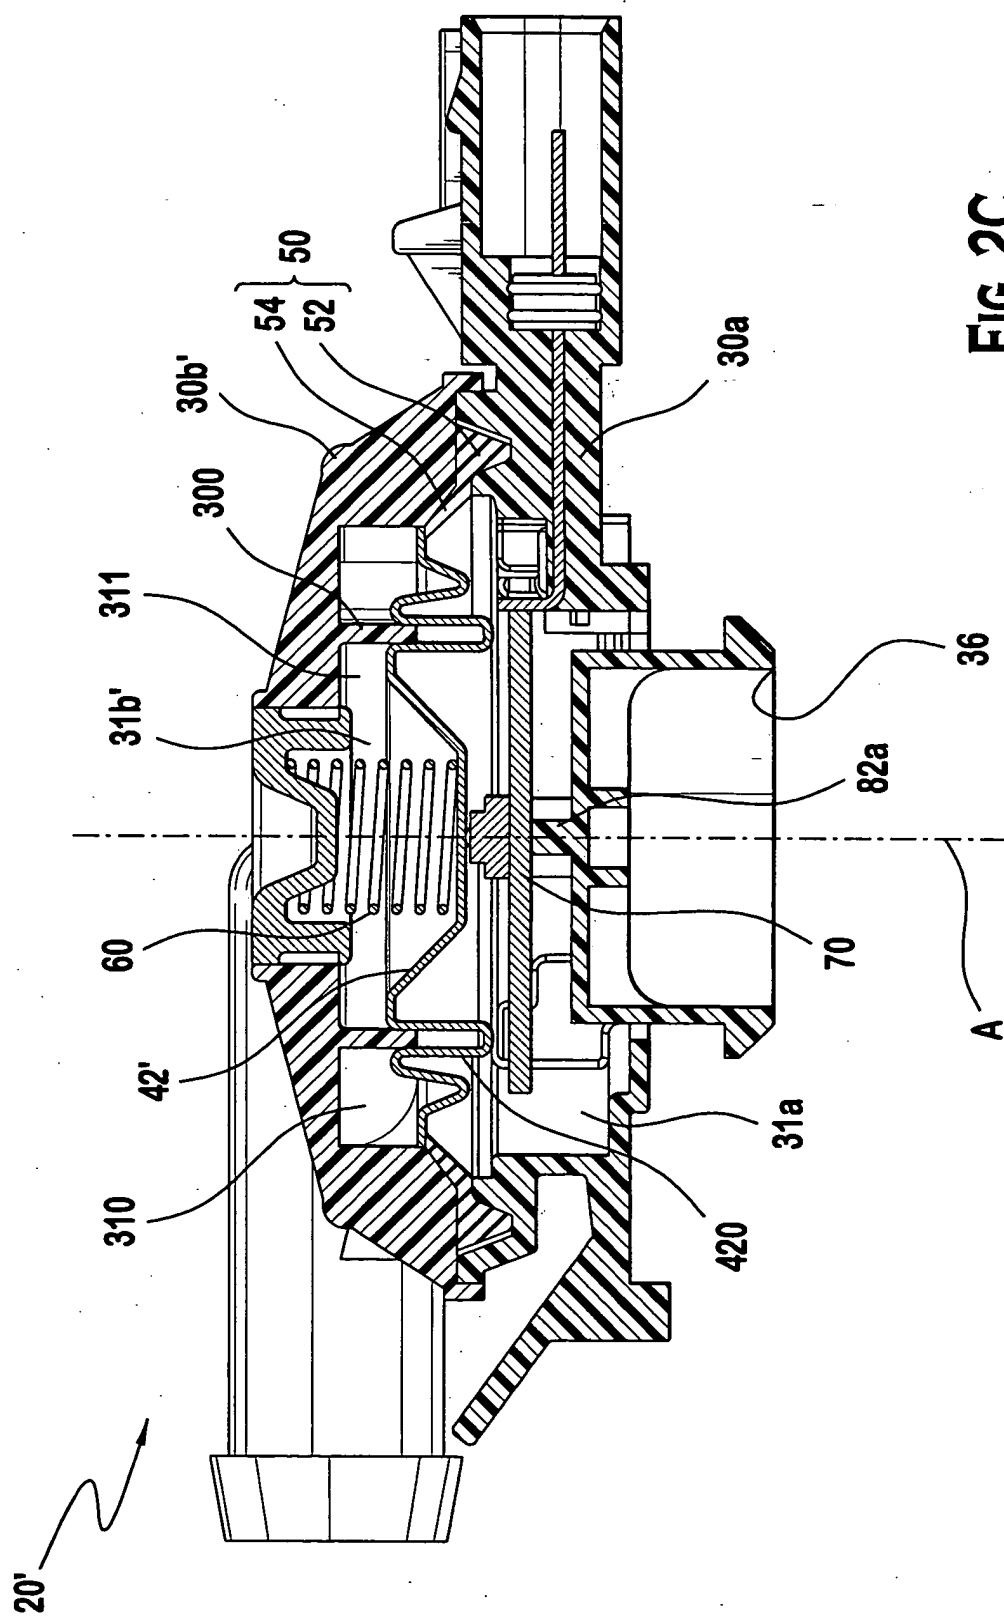


Fig. 2C

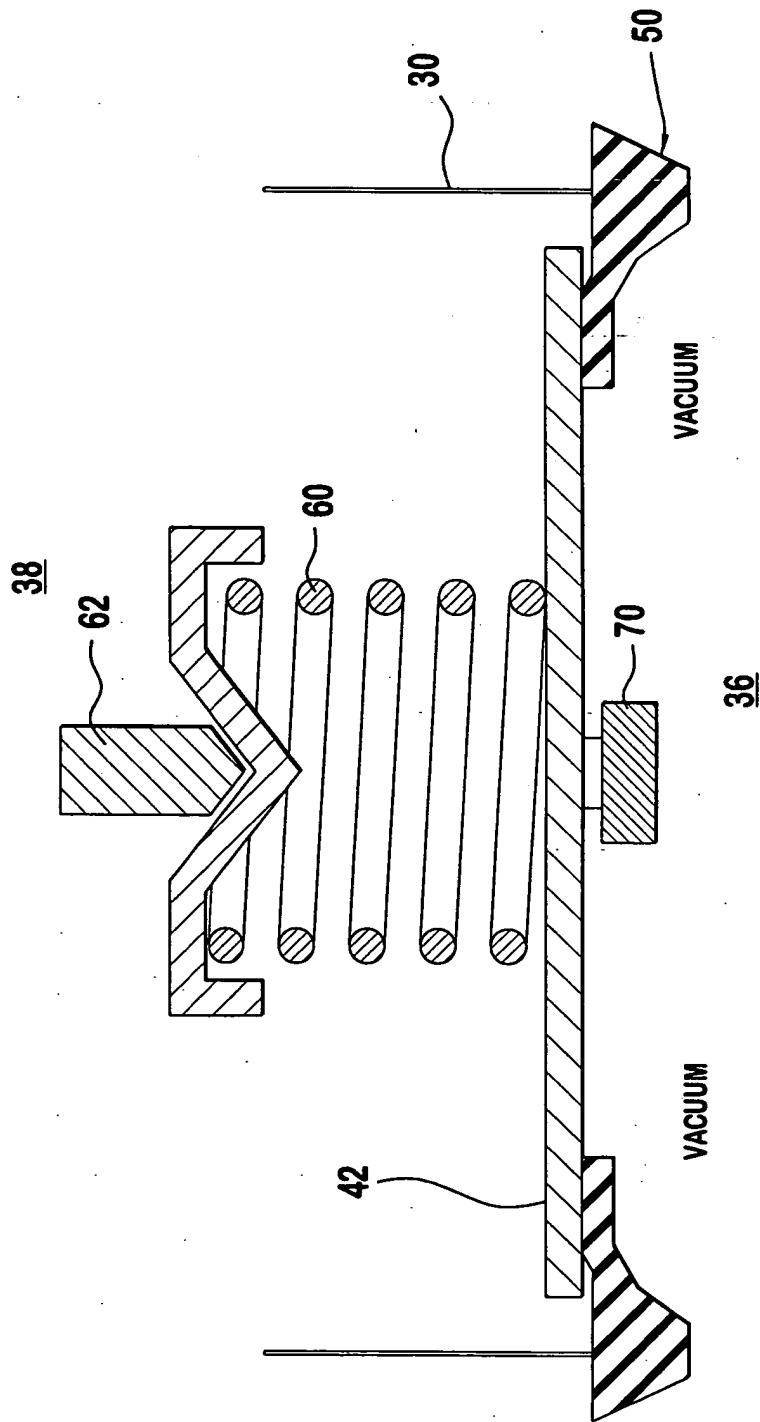


FIG. 3A

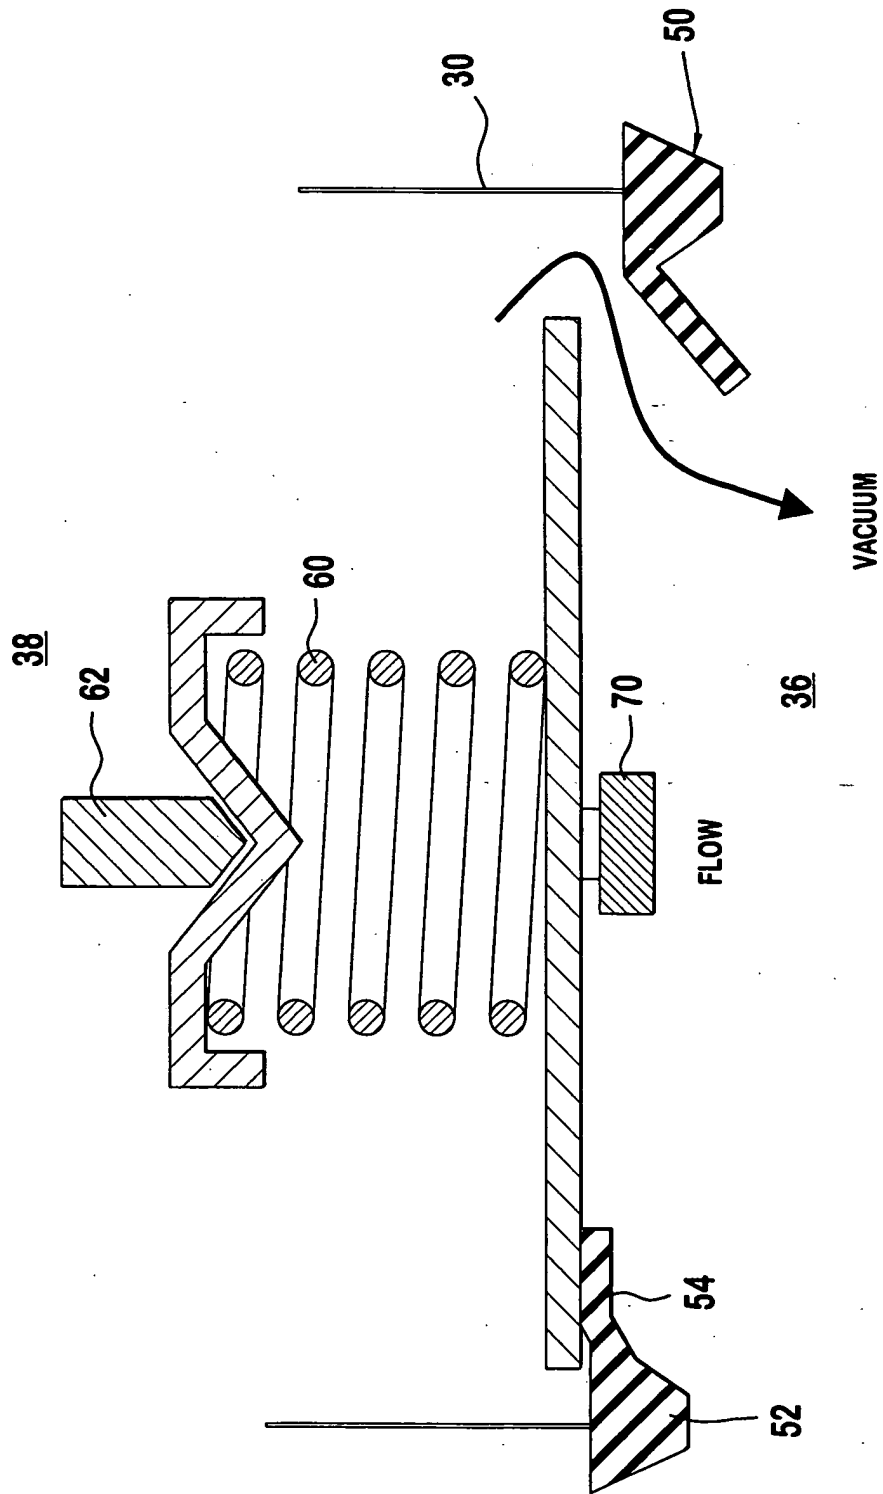


FIG. 3B

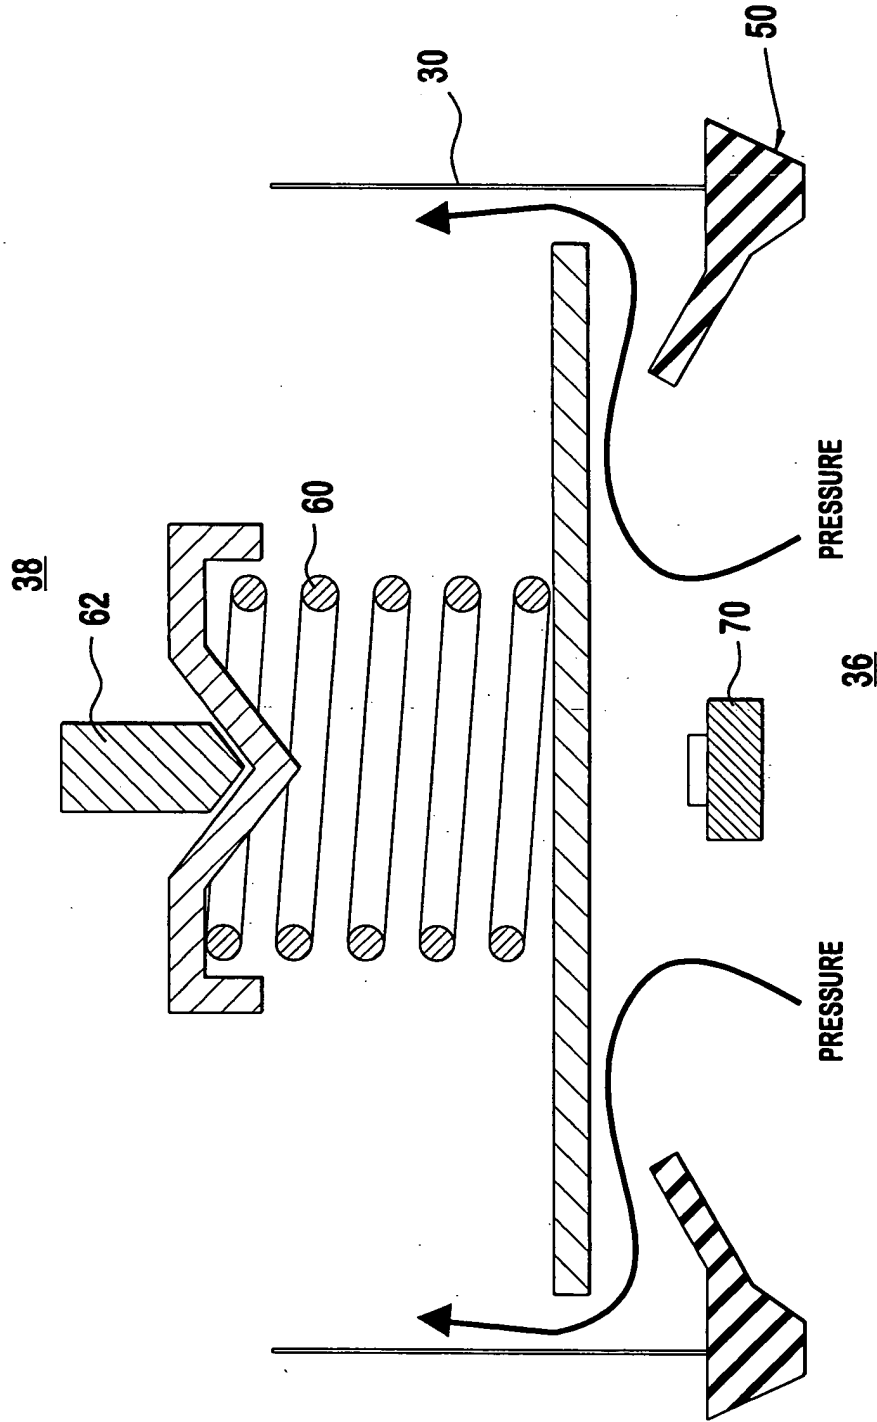


FIG. 3C


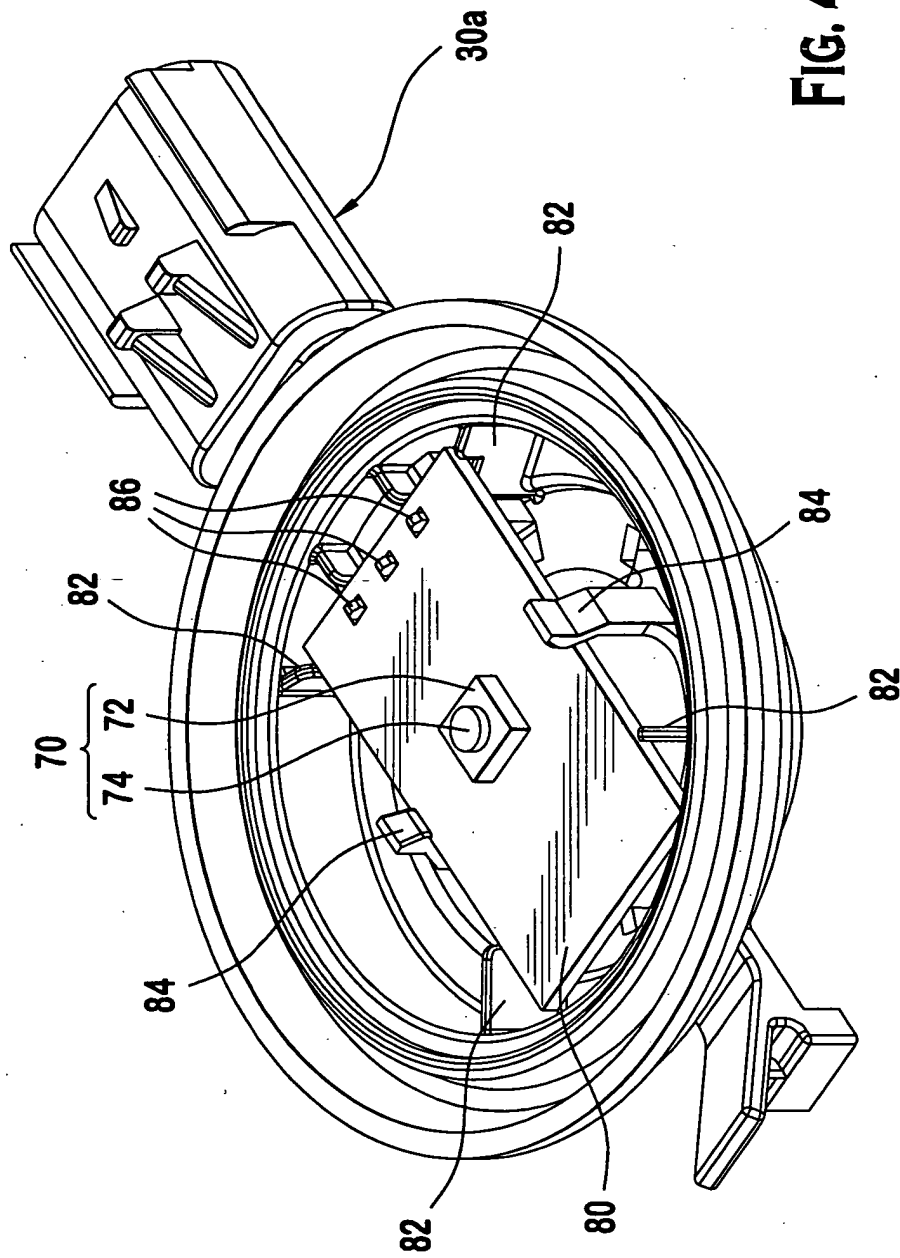


FIG. 4

FIG. 5A**FIG. 5B**

STEP CHANGE IN FLOW: 0-80 SLPM
AMBIENT TEMPERATURE: 20 DEGREES C
HEATING RESISTOR: 100% PWM

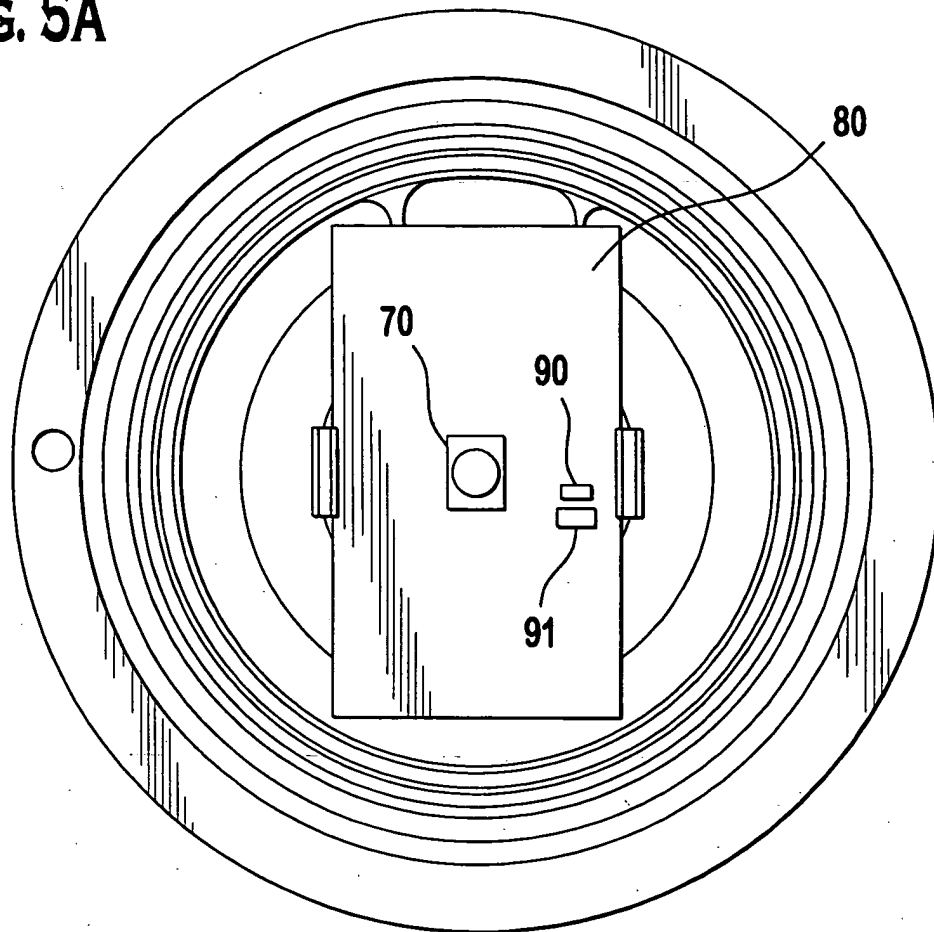